


- INCREASE CONVENIENCE & PRODUCTIVITY • ELIMINATE LIFTING FORK EXTENSIONS ONTO FORKS •
- SAFELY HANDLE LONG BULKY LOADS •

Type of Extensions



Patent Pending

AUTOMATIC LOCK • suffix AL



FULL LOOP • standard*



PIN STYLE • suffix P



REAR SPACER • suffix RS*



ROUNDED • suffix R*




TRIANGULAR • suffix T*

FORK EXTENSIONS



- Fits Onto Forks Up To 2" Thick
- Welded Steel Construction
- Cast Steel Fork Tips



Sloped Top and Bottom
Tapered Both Sides

Fork extensions provide the extra support needed to lift long or large objects with a fork truck. Steel retaining strap (loop style*) prevents fork extensions from sliding off forks during use. Powder coat yellow finish. **OSHA regulations require that extensions are no more than 150% of the existing fork length. (e.g. 48" existing forks, the fork extension should not exceed 72")**

HOW TO USE / INSTALLATION

AUTOMATIC LOCK: Drive forks directly into fork extensions while resting on floor and lift forks. Tine lock loop will automatically lock behind heel of fork. To remove, lower forks to ground, tine lock loops will automatically unlock. Back fork truck out of fork extensions. Patent Pending.

***LOOP STYLE, ROUND or TRIANGULAR:** Insert the loop at the tip of the fork and slide it up at a 45° angle then lay it down over the existing fork. The round and triangular style extension is ideal for transporting rolls of material.

PIN STYLE: Remove pin and lay extension over fork or drive fork truck into the extension. Reinsert the pin around the heel of the fork to secure extension.

REAR SPACER: Insert the loop at the tip of the fork and slide it up at a 45° angle then lay it down over the existing fork. Load pallets into the rear of trailer conveniently and easily. Practical to push pallets two or three deep into a trailer.

Model Number	Accommodates Fork Width	Fork Ext. Inside Width	Usable Length	Min. Fork Length	Max. Fork Thickness
FE-4-48	4"	4-1/2"	48"	32"	2"
FE-4-54	4"	4-1/2"	54"	36"	2"
FE-4-60	4"	4-1/2"	60"	40"	2"
FE-4-72	4"	4-1/2"	72"	48"	2"
FE-4-84	4"	4-1/2"	84"	56"	2"
FE-4-96	4"	4-1/2"	96"	64"	2"
FE-5-48	5"	5-1/2"	48"	32"	2"
FE-5-54	5"	5-1/2"	54"	36"	2"
FE-5-60	5"	5-1/2"	60"	40"	2"
FE-5-72	5"	5-1/2"	72"	48"	2"
FE-5-84	5"	5-1/2"	84"	56"	2"
FE-5-96	5"	5-1/2"	96"	64"	2"
FE-6-48	6"	6-1/2"	48"	32"	2"
FE-6-54	6"	6-1/2"	54"	36"	2"
FE-6-60	6"	6-1/2"	60"	40"	2"
FE-6-72	6"	6-1/2"	72"	48"	2"
FE-6-84	6"	6-1/2"	84"	56"	2"
FE-6-96	6"	6-1/2"	96"	64"	2"



Rear Spacer Fork Extensions




Round Shaped Fork Extensions

FORK & CARRIAGE MOUNTED RUG RAMS


Transport rolls or coils with our sturdy Rug Rams/Carpet Poles. Available in either carriage or fork mounted units. 2-3/4" diameter high strength, rotatable, replaceable pole has tapered tip. All rug rams are made of steel construction and painted blue.

Fork Mounted (Inverted) Rug Rams feature 7-1/2"W x 2-1/2"H fork pockets on 24" centers. Safety chain is a standard feature.

Carriage Mounted Rug Rams are available in class II or III and feature a spring loaded locking pin to secure to the carriage.

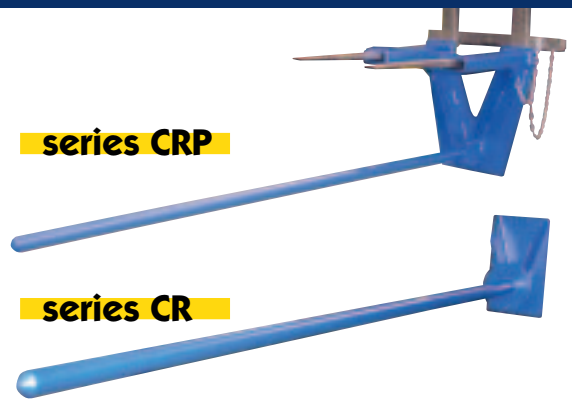

Model Number	Description	Usable Pole Length	Pole Diameter	Capacity (pounds)	Carriage Class	VCG (inches)	HCG (inches)	Lost Load (pounds)
CRP-108	Fork Mount	108"	2-3/4"	2,500	--	5.7	78.5	526
CRP-120	Fork Mount	120"	2-3/4"	2,200	--	5.6	87.9	550
CRP-144	Fork Mount	144"	2-3/4"	1,800	--	5.4	108	570
CR-108-2	Carriage Mount	108"	2-3/4"	2,500	2	7.7	35.7	397
CR-120-2	Carriage Mount	120"	2-3/4"	2,200	2	7.6	40.7	421
CR-144-2	Carriage Mount	144"	2-3/4"	1,800	2	7.4	51.2	478
CR-108-3	Carriage Mount	108"	2-3/4"	2,500	3	8.6	34.0	345
CR-120-3	Carriage Mount	120"	2-3/4"	2,200	3	8.5	38.9	366
CR-144-3	Carriage Mount	144"	2-3/4"	1,800	3	8.0	48.0	416



Carriage Mount is available in Class II or III


FORK TRUCK FORK CADDY

Transport fork truck forks easily and safely. This caddy also allows the user to easily remove and install forks onto a fork truck. This is usually a dangerous and time consuming process, but now it is a breeze.

After transporting the fork to the forklift, rotate the handle 90° then slide the fork onto the carriage.

The Fork Caddy has easy-grip handles and rolls smoothly on two swivel casters. A fork tine lock secures the fork into the caddy to keep it in place while transporting.

The comfort-grip handle pivots up to 180° to allow for easier mobility. Lightweight and small enough to store and transport easily. Steel construction



model FC-29



POWDER
COATED
TOUGH™

FORK TRUCK FORGED FORKS

Model Number	Capacity (lbs.) (24" Load Center)	Thickness (inches)	Length (inches)
F4-1.25-36	3,000	1.25	36
F4-1.25-48	3,000	1.25	48
F4-1.50-36	4,000	1.50	36
F4-1.50-42	4,000	1.50	42
F4-1.50-48	4,000	1.50	48
F4-1.50-60	4,000	1.50	60
F4-1.75-36	5,000	1.75	36
F4-1.75-42	5,000	1.75	42
F4-1.75-48	5,000	1.75	48
F4-1.75-60	5,000	1.75	60

- Four Inches Wide
- I.T.A. Class II
- Includes Locking Pin



VESTIL MANUFACTURING COMPANY
2999 North Wayne Street, P.O. Box 507
Angola, IN 46703 USA
Phone (260) 665-7586 • Fax (260) 665-1339
E-mail: sales@vestil.com • www.vestil.com

DISTRIBUTED BY: